




Find out more  
Scan for more information

### Description

HoardSafe is CLD’s range of sustainable and secure hoarding. Manufactured from composite recycled plastic panels which click easily into place and are installed on steel rails. HoardSafe S1 is a security rated version which incorporates a Securus steel mesh panel to the rear which has been certified by the Loss Prevention Certification Board to provide a minimum of 60 seconds against attack. The system can be fixed to blocks or ground buried. transportation and installation.

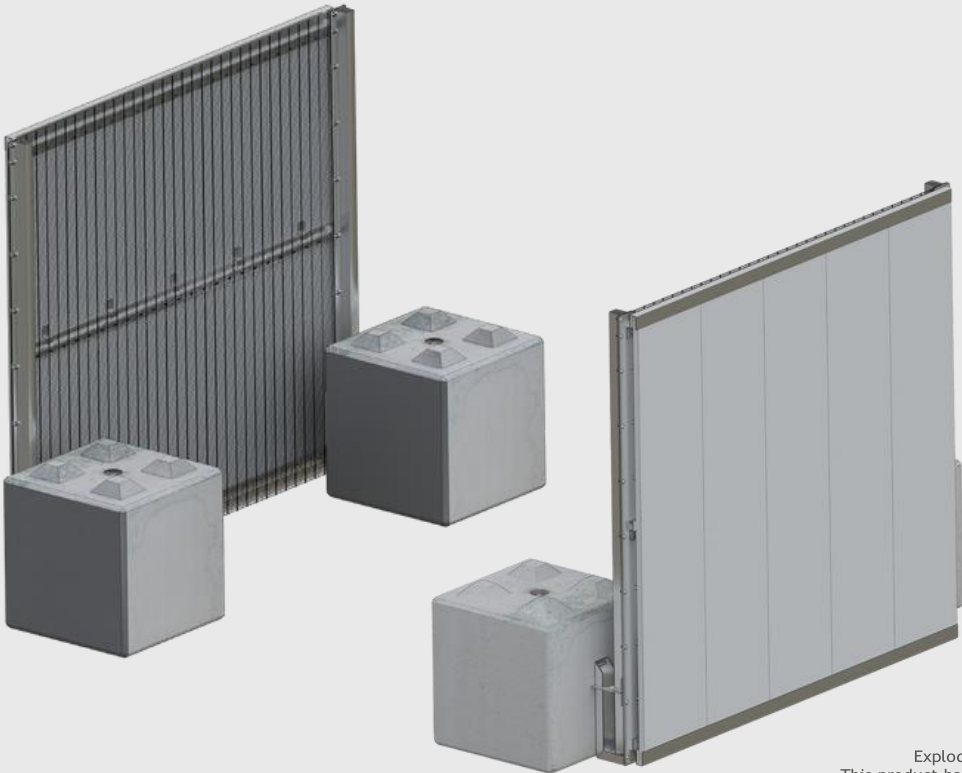

### Features

- Security rated site hoarding
- Sustainable alternative to standard hoarding
- BS EN 1991 wind loading tested to in excess of 100 mph
- Ideal for Sensitive construction sites requiring high security, or protecting people in open spaces.

Exploded view of post and fixing details for the CLD HoardSafe S1  
This product has additional features not demonstrated for security reasons

## Product Technical Information

Standard	LPS 1175 A1 (SR1) Issue 8 BS EN ISO 1461:2022 BS EN 13438:2013 BS EN 1991 Wind Loading TWf2012:01 Temporary Works Forum Secured by Design - Police Preferred Specification
Panel Type	1.37in thick recycled PVC board, 19.68in wide panels, height to suit CLD Securus mesh panel to rear
Panel Width	19.68in minimum
Wire Diameter	0.15in minimum
Mesh size	3 x 0.49in mesh
Fixings	M8 cup square bolt with washer & hex nut
Available Heights	71.1in to 118.34in
Nominal Heights	5.9ft to 9.84ft
Finish	Polyester powder-coated to 60-80 microns or 160-200 microns with marine grade and metallics. Any RAL color available
Top Edge Projection	-
Panel installation	Bottom rail to follow ground level
Topping Options	Options such as anti-climb available on request
Posts	Special flanged post, galvanized after manufacture
Post Dimensions	3.14in x 2.36in
Post Centers	99.21in
Foundations	Post fixed to kentledge block using 4 way adjustable bracket. Ground bury option. Can also be dug in. Set posts in holes minimum of 17.71in square x 31.49in deep. Note: Contractor/ client is responsible for the foundation size suitable for the ground conditions and height of fence.
Warranty	Minimum of 15 years against manufacturing defects

## Disclaimer

Fencing should be installed in accordance with BS 1722-14. Every care has been taken to ensure that all information provided on this data sheet is accurate. CLD Fencing Systems Ltd reserves the right to change product specification at any time. Please ensure that you have the latest information which can be found on our website or by contacting our team.

Document Reference - CLD\_HoardSafe\_S1\_DS\_20230628