

CLD FenceSafe Securus SR1

Temporary Fencing System Rated to LPS 1175 (SR1) Issue 7



Physical Security Systems



Find out more
Scan for more information

Description

Offering safety, security and sustainability, CLD's FenceSafe Securus S1 system is the world's first LPS1175 security rated temporary fencing system. Using our innovative foundation free cantilevered FenceSafe base coupled with our Securus 358 mesh fencing, the system is guaranteed to offer at least 60 seconds delay against attack. Both the base and the Securus panels can be reused. The panels can even be used in a permanent fenceline.



Features

Overlapping panels for added security

Ideal for Major events, Utilities, Crowded Places, Airports

Full length clamp bar with no external fixings

Through bolt with rear fastening

Exploded view of post and fixing details for the CLD FenceSafe Securus SR1
This product has additional features not demonstrated for security reasons



cld-systems.com


CLD FenceSafe Securus SR1

Temporary Fencing System Rated to LPS 1175 (SR1) Issue 7

Product Technical Information

Standard	LPS 1175 A1 (SR1) Issue 7 BS1722-14: 2017 BS EN ISO 1461:2022 BS EN 13438:2013 Secured by Design - Police Preferred Specification
Panel Type	Installed using CLD FenceSafe Base. Single layered mesh system.
Panel Width	2518mm
Wire Diameter	4mm
Mesh size	76.2 x 12.5 mm mesh
Fixings	41mm x 21mm clamping channel and CLD SafeTFix hidden fixing system.
Available Heights	2440mm
Nominal Heights	2.4m (other heights available uncertified)
Finish	Polyester powder-coated to 60-80 microns or 160-200 microns with marine grade and metallics. Any RAL colour available
Top Edge Projection	-
Panel installation	Bottom of panel maximum 50mm above ground
Topping Options	Barbed and razor wire, cranked and straight available if required
Posts	60x60 RHS post, galvanised after manufacture and polyester powder-coated to match fencing
Post Dimensions	60mm x 60mm. Floating corner posts 60mm x 60mm
Post Centres	1220mm +/- 9mm
Foundations	Installed using CLD FenceSafe Base, with 4-way adjustable bracket and 200kg of ballast. System to be designed in accordance with BS6399-2 or BS EN 1991 for area of use.
Warranty	Minimum of 15 years against manufacturing defects

System Details

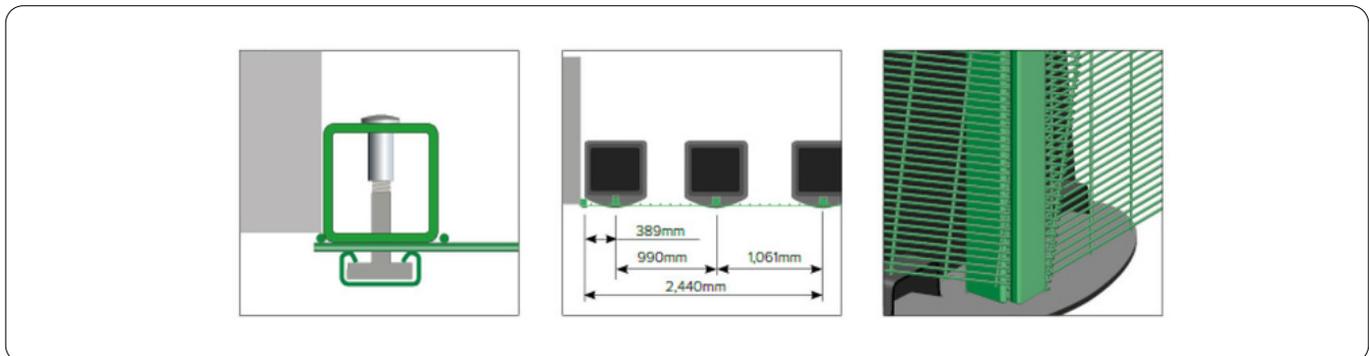

Disclaimer

Fencing should be installed in accordance with BS 1722-14. Every care has been taken to ensure that all information provided on this data sheet is accurate. CLD Fencing Systems Ltd reserves the right to change product specification at any time. Please ensure that you have the latest information which can be found on our website or by contacting our team.

Document Reference - CLD_FenceSafe_Securus_SR1_DS_20231208