

CLD FenceSafe Dulok Lite

On ground/temporary double wire panel system



Physical
Security
Systems



Find out more
Scan for more information

Description


FenceSafe Dulok Lite offers a traditional general purpose wire fenceline in an on-ground, temporary format and sustainable format. Manufactured from twin 6mm horizontal wires, either side of 5mm diameter vertical wires, Dulok Lite is a durable and low maintenance general purpose fence system. Panels are fixed to steel posts using metal clips with tamper-proof angled returns which are secured in place with pin hex screws for added security. Installed using CLD's unique FenceSafe Base, made from 100% recycled plastic and 90% recycled UK and European steel, both elements of the system can be used over and over again.

Features

Anti-cut through panels

Flat panel to accommodate
debris netting

Steel security clip with
security pin hex screw

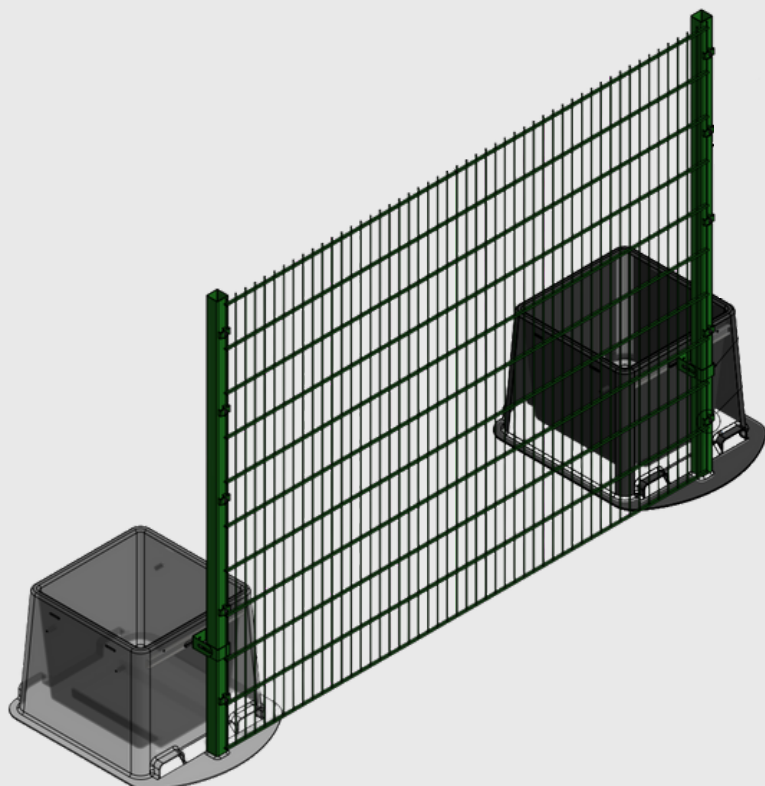

Exploded view of post and fixing details for the CLD FenceSafe Dulok Lite
This product has additional features not demonstrated for security reasons



cld-systems.com


CLD FenceSafe Dulok Lite

On ground/temporary double wire panel system

Product Technical Information

Standard	BS1722-14:2017 BS EN 13438:2013 BS EN ISO 141:2009
Panel Type	Mesh and wire. Single vertical and double horizontal wires on FenceSafe base
Panel Width	2506mm
Wire Diameter	5mm verticals and twin 6mm horizontal
Mesh size	200 x 50mm
Fixings	47mm x 35mm steel clips.
Available Heights	630mm to 3030mm
Nominal Heights	0.6m to 3.0m
Finish	Polyester powder-coated to 60-80 microns or 160-200 microns with marine grade and metallics. Any RAL colour available
Top Edge Projection	30mm
Panel installation	Bottom of panel approx 40mm above ground
Topping Options	Barbed and razor wire, cranked and straight available if required
Posts	SHS, galvanised after manufacture and polyester powder-coated to match fence panel. Mounted onto FenceSafe Base with 47mm x 25mm steel clips.
Post Dimensions	60mm x 60mm
Post Centres	2520mm
Foundations	Installation with CLD FenceSafe Base unit, with 4-way adjustable bracket and 200kg of ballast. System to be designed in accordance to BS6399-2 or BS EN 1991 for area of use.
Warranty	Minimum of 15 years against manufacturing defects.

System Details

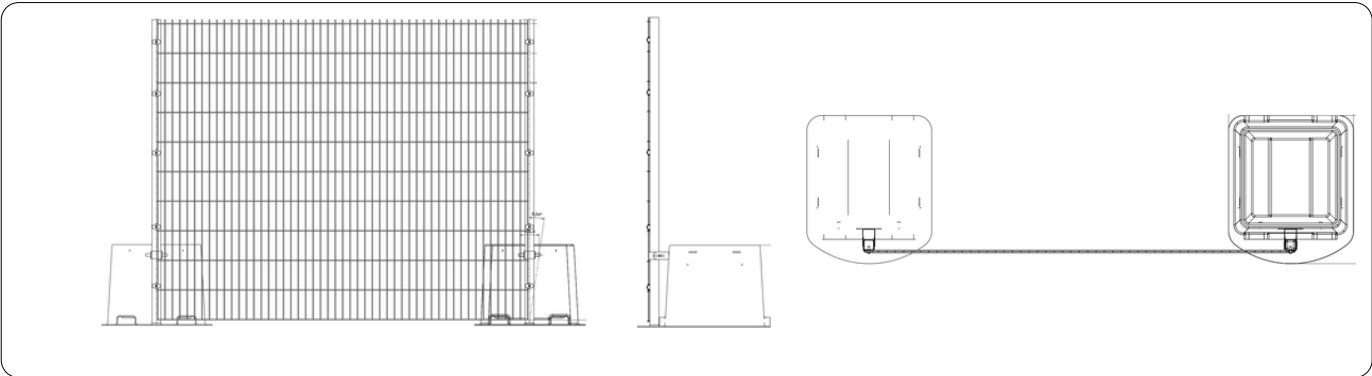

Disclaimer

Fencing should be installed in accordance with BS 1722-14. Every care has been taken to ensure that all information provided on this data sheet is accurate. CLD Fencing Systems Ltd reserves the right to change product specification at any time. Please ensure that you have the latest information which can be found on our website or by contacting our team.

Document Reference - CLD_FenceSafe_Dulok_Lite_DS_20230302